

# Realization of porous silicon based miniature fuel cells

Tristan Pichonat , Bernard Gauthier-Manuel,

*Laboratoire FEMTO-ST, Département LPMO, CNRS UMR 6174,*

*32 avenue de l'observatoire, 25044 Besançon Cedex, FRANCE*

*Tel: +33 (0)3 20 00 67 63 (Pichonat), +33 (0)3 81 85 39 90 (Gauthier-Manuel)*

*E-mail: tristan.pichonat@isen.iemn.univ-lille1.fr; gauthier@lpmo.edu*

## Abstract

In this paper, we demonstrate a new way of making low-cost miniature fuel cells for portable applications based on proton-conducting porous silicon membranes. The novelty, presented here, consists in the chemical grafting of molecules containing ionizable groups on the pores walls to mimic the structure of ionomer, such as Nafion<sup>®</sup>, usually used to ensure the proton conductivity of PEM fuel cells. We obtain an inorganic, dimensionally stable, proton conducting membrane with many optimizable parameters such as the pore size and the pore structure of the membrane or the nature of the grafted molecules. Moreover the use of a silicon substrate offers advantages of serial and parallel integration, the possibility of encapsulation by wafer bonding and gas feed and electrical contacts can be included into the membrane etching process thanks to simple KOH wet etching processes and metal sputtering.

*Keywords : miniature fuel cell, porous silicon, membrane, chemical grafting, Nafion<sup>®</sup>.*

## 1. INTRODUCTION

If miniature fuel cells will soon be challenging with current batteries for the supply of portable applications such as cellular phones or PDA and nomadic electronic, recent papers [ 1, 2] have shown the growing interest turned to the development of silicon-based miniature fuel cells for chip-scale power. Most of these fuel cells have used Nafion<sup>®</sup> as the proton exchange membrane, yet it does not seem to be the right solution. Indeed Nafion<sup>®</sup> membranes are inadequate to standard microfabrication techniques : they cannot be easily patterned with standard photolithography and their volumetric variations due to hydration are a real problem for the assembly with silicon substrates.

Many alternate ways have been proposed to avoid these problems, one of the solutions being to use organic-inorganic hybrid membranes. Literature reports original research axes like hybrid silica / Nafion<sup>®</sup> membranes [ 3] or a porous silica membrane filled with sulfonated polyelectrolyte [ 4] yet not suitable to obtain easily integrated miniature cells.

The revival of activity since 1990 concerning the study of porous silicon (PS), revival partly aroused by Canham [ 5] works on PS photoluminescence phenomena, allowed a better knowledge about the proper-

ties of PS and the discovery of new applications for this material. In the case of fuel cells, the use of PS as a gas diffusion layer [ 6] or as a support for catalyst [ 7] has been demonstrated. Recent papers [ 8, 9] have shown the relevance of using PS as the membrane of the fuel cell.

Our approach consists in a new way of making miniature fuel cells using a silicon substrate with PS membranes on which appropriate molecules for proton conduction are grafted. This solution allows to avoid the use of expensive ionomers and to take advantage of silicon for mass production, easy etching process, possibility of integration and metallization of electrical contact within the process.

## 2. EXPERIMENTAL

### 2.1. Silicon membrane

The substrate doping is chosen as a function of the desired PS morphology. Phosphorus-doped 0,012-0,014  $\Omega$ .cm  $n^+$ -type (100) oriented silicon wafers are used for the manufacturing of silicon membranes with standard wet KOH etching process. The process, described in details elsewhere [ 8], uses classical photolithography and masking is obtained with a sputtered Cr-Au layer (Cr layer of 15 nm thick and Au layer of 800 nm thick). A previous thermal oxidation of

the silicon wafer ensures the electrical insulation of the membrane. Membrane thickness is fixed to 40  $\mu\text{m}$  by adjusting processing time and temperature. Collective processing allows to obtain 69 square membranes with active areas of 7  $\text{mm}^2$  on a 4" wafer.

## 2.2. Porous silicon

Silicon membranes are made porous by anodization in a double-tank cell [ 11] conceived by AMMT GmbH. It consists of two half-cells in which Pt electrodes are immersed and the silicon wafer separates and isolates the two half-cells.

The electrolyte used is an ethanoic-HF solution (50 % of pure ethanol and 50 % of a 48 % HF solution). Anodization is carried out in the dark at constant current, with a current density from 18 to 36  $\text{mA}/\text{cm}^2$  to obtain pores from 6 to 10 nm diameter and a porosity of about 50 % [ 13].

The previous deposition of the Au layer allows the localization of the porosity on silicon membranes during anodization. Indeed a simple LPCVD  $\text{Si}_3\text{N}_4$  layer generally used as the masking layer for localized PS (see for example [ 12]) would not allow long time anodization as precious metals (Au, Pt, Ag) do. The silicon oxide layer under the Cr-Au layer avoids any parasitic formation of PS with the possible internal current generated between silicon substrate and the metallic layer [ 10].

Once anodization is achieved, membranes are rinsed into an oxydizing bath neutralizing HF solution then into several deionized water baths and finally isopropyl alcohol for reducing stress into pores. Membranes are finally dried at ambient air. PS membranes with a silica surface layer are obtained. The characterization of these porous membranes is made by FESEM imaging (figure 1).

As proved by conductivity measurements (see [ 8]) and FESEM imaging (figure 2), only a few channels are totally opened with this anodization process. Indeed when first channels open on the back side of the membranes, the current goes through these opened pores and anodization no longer continues on the other pores. This can be explained by the inhomogeneity of the wafer thickness and by the parasitical anodization reaction between the metal layer and the silicon. Even though the silicon is isolated by the silicon oxide layer, it seems that the least contact between silicon and gold can lead to this non-controlled porous layer at the surface of the back side of the membrane. The phenomena may also occur on the front side but the classical anodization is preponderant.

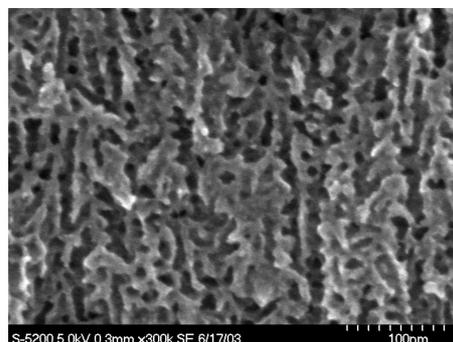


Figure 1. FESEM cross section view of a  $n^+$ -type silicon membrane made porous by anodization carried out at 36  $\text{mA}/\text{cm}^2$  in the dark in an ethanoic-HF bath. Channels have an average diameter of 10 nm.

To solve this problem, we add a short R.I.E. (Reactive Ion Etching) process using  $\text{SF}_6$  and  $\text{O}_2$  gases for silicon etching on the back side of the membranes in order to make sure that all the pores are opened ([ 8]). This additional process allows us to etch around 2  $\mu\text{m}$  thick in 3 min. which are necessary to open the whole back side porosity. The characterization of opened pores is carried out by conductivity measurements in a 3 % hydrochloric acid electrolyte solution. To ensure the protonic conductivity, previous solution consisting in filling pores with a Nafion<sup>®</sup> solution has been fully described in [ 8].

The new solution, described here, does not need Nafion<sup>®</sup> nor any ionomeric solution. It consists in taking advantage of the great specific surface of PS by grafting the pores internal surface with silane molecules bearing acid functions. In doing so we hope to mimic the supposed structure of Nafion<sup>®</sup> membranes and obtain significant proton conductivity. The N-[(3-trimethoxysilyl)propyl]ethylenediamine triacetic acid in the form of trisodium salt, commercially available from United Chemical Technologies Inc (UCT), was chosen to our first investigations.

As the surface of PS is covered with a silica layer the classical process of silanization can be directly used. The size of the pores should be the smallest possible in order to reduce the "cross-over" of gas through the porous membrane decreasing the fuel cell voltage. Thus pores with a diameter of 6 and 10 nm have been used for the grafting.

The first step consists in creating silanol functions (Si-OH) at the surface of PS. It is realized by immersing membranes into "Piranha" solution, consisting in a

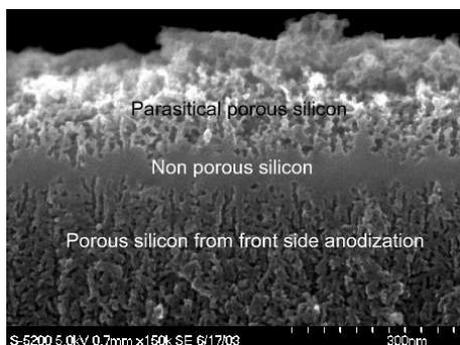


Figure 2. FESEM cross section view of the back side of a membrane after anodization. Only a few pores are opened and the PS layer at the surface of the back side is made by a parasitical anodization due to a contact between gold and silicon.

mixture of a 80 % solution of pure sulfuric acid with 20 % of a 33 % aqueous solution of hydrogen peroxide, for 10 min.

For the grafting of silane functions, hydrophilic porous membranes are put into a 1 % acid silane solution in ethanol for 1 hour (time empirically determined with conductivity measurements) at room temperature and ambient air. In order to replace -Na endings by -H endings to get the real carboxylic behaviour for the grafted function, membranes are immersed for 12 hours in a 20 % solution of sulfuric acid, then rinsed in deionized water.

### 2.3. Electrodes

We use E-tek electrodes composed of a carbon conducting cloth filled with platinum (20 % Pt on Vulcan XC-72) used as H<sub>2</sub> / O<sub>2</sub> catalyst. They are fixed to the membrane in the same way as previously done in the case of the PS membranes filled with Nafion<sup>®</sup> [ 8].

A 1  $\mu$ l drop of Nafion<sup>®</sup>-117 solution provides, after remove of the solvent, a proton-conducting link between the electrodes and the membrane. This amount of Nafion<sup>®</sup> solution used as glue is too small to fill the pores of the and generate proton conductivity in the membrane.

As the membrane borders are covered with a Cr-Au layer to collect current, we just have to make sure that the electrodes and the membrane plated borders are in contact (figure 3).

This process allows direct comparison of the results obtained with the two techniques.

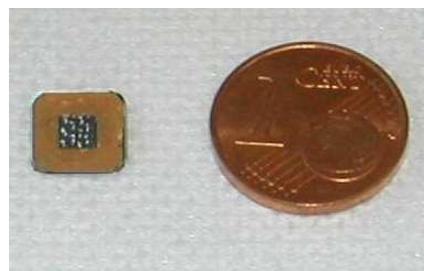


Figure 3. Membrane electrodes assembly, scale comparison with a 1 cent (0,01 euro) coin.

## 3. RESULTS AND DISCUSSION

All results presented here have been measured with single membrane electrodes assemblies. Measurements are carried out at room temperature. H<sub>2</sub> feeding is provided by a 20 % NaOH solution electrolysis and O<sub>2</sub> directly by ambient air. In order to bring the gas to the membrane, we use a home-made test cell in which the membrane electrodes assembly is mounted. Moreover it allows us to take electrical contacts on each side of the membrane and to evacuate gas exhausts. The test cell is electrically connected to an ammeter and a voltmeter. Measurements with a Nafion<sup>®</sup>-filled PS membrane previously reported in [ 8] have been added to the I-V characteristic of the grafted PS membrane for comparison.

We obtain a current density of about 120 mA/cm<sup>2</sup> in minimal charge and 470 mV for open circuit tension (figure 4). These performances are preserved for several hours as long as the assembly is supplied with H<sub>2</sub>.

If the performances achieved with both solutions are comparable in terms of power density (17 mW/cm<sup>2</sup> for the grafted membrane and 18 mW/cm<sup>2</sup> for the Nafion<sup>®</sup>-filled membrane) and current density (respectively 120 mA/cm<sup>2</sup> and 101 mA/cm<sup>2</sup>), the open circuit tension of the grafted membrane is really lower than the one of the Nafion<sup>®</sup>-filled membrane. This can be explained by the cross-over of gas through the grafted porous membrane. In that solution the pores of diameter 10 nm are not filled with polymer and the substantial gas diffusion through the membrane, induces partial reverse voltage.

This cross-over should be reduced, in future experiments, by decreasing the pore diameter to a value closer to the assumed pore size in Nafion<sup>®</sup> structure (about 3-4 nm diameter).

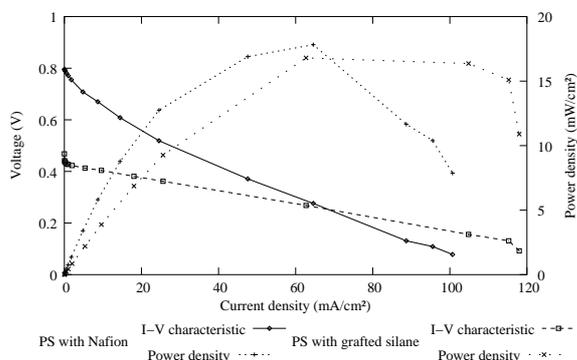


Figure 4. I-V characteristic of a grafted PS membrane compared with a mesoporous silicon membrane filled with Nafion<sup>®</sup>. Both voltage and power density are represented.

A comparison of the slopes of both I-V curves in the linear regime shows clearly a lower slope with the grafted membrane indicating a better conductivity than obtained with Nafion<sup>®</sup> filling.

#### 4. CONCLUSION

We have demonstrated a new way of making miniaturized fuel cells using a porous silicon membrane and a silane grafted on pores walls. This technique allows to use the great specific surface of the PS and to avoid the problems due to the use of ionomeric membranes. Its main advantage is the total compatibility with silicon micromachining which allows cell integration. First tests are encouraging and allow hope for even better performances in the future. At present time the present performances are enough to power, by way of parallel and serial coupling of elementary cells, nomadic electronics as long as an hydrogen source is available.

The limitations of this fuel cell are presently the supply in H<sub>2</sub> and the assembly with the electrodes which are ways we are investigating.

#### Acknowledgements

The submitted paper is the subject of a patent pending (deposit number US 10/407069). This work was financially supported by the French Industry Agency within the framework of MicroPAC program. One of the authors (T. P.) benefited by a grant from Sagem SA. We would like to thank P. Blind of C.T.M. (Centre de transfert des microtechniques de Franche-Comté) for the KOH wet etching, A. Mesnier and L.

Petrini for their helpful assistance. We acknowledge Elexience and Hitachi for providing the possibility to use Hitachi S5200 and S4800 FESEMs.

#### References

1. G.Q. Lu, C.Y. Wang, T.J. Yen, X. Zhang, Development and characterization of a silicon-based micro direct methanol fuel cell, *Electrochim. Acta* 49 (5) (2004) 821.
2. S.C. Kelley, G.A. Deluga, W.H. Smyrl, Miniature fuel cells fabricated on silicon substrates, *AIChE J.* 48 (5) (2002) 1071.
3. D.H. Jung, S.Y. Cho, D.H. Peck, D.R. Shin, J.S. Kim, Performance evaluation of a Nafion/silicon oxide hybrid membrane for direct methanol fuel cell, *J. Power Sources* 106 (2002) 173-177.
4. T. Yamaguchi, M. Ibe, B.N. Nair, S. Nakao, A pore-filling electrolyte membrane-electrode integrated system for a direct methanol fuel cell application, *J. Electrochem. Soc.* Vol.149, No.11 (2002) A1448-A1453.
5. L.T. Canham, Silicon quantum wire array fabrication by electrochemical and chemical dissolution of wafers, *Appl. Phys. Lett.* 57 (1990) 1046.
6. H. L. Maynard and J. P. Meyers, *Small Fuel Cells 2000 - 2<sup>nd</sup> annual small fuel cells and battery technologies for portable power applications international symposium*, New Orleans, 2000.
7. M. J. Riezenman, Mighty mites, *IEEE Spectrum* vol. 40 No. 6 (2003) 30-33
8. T. Pichonat, B. Gauthier-Manuel, D. Hauden, A new proton-conducting porous silicon membrane for small fuel cells, *Chem. Eng. J.*, vol. 101, 1-3 (2004) 107-111.
9. S. Gold, K. L. Chu, C. Lu, M. A. Shannon, R. I. Masel, Acid loaded porous silicon as a proton exchange membrane for micro fuel cell, *J. Power Sources* 135 (2004) 198-203.
10. A. Splinter, J. Stürmann, W. Benecke, Novel porous silicon formation technology using internal current generation, *Mat. Sc. and Eng. C* 15 (2001) 109-112.
11. A. Halimaoui, in *Properties of porous silicon*, edited by L. Canham, published by INSPEC, vol. 18 (1997).
12. R. Angelucci, A. Poggi, L. Dori, G.C. Cardinali, A. Parisini, A. Tagliani, M. Mariasaldi, F. Cavani, Permeated porous silicon for hydrocarbon sensor fabrication, *Sensors and Actuators A* 74 (1999) 95-99.
13. V. Lehmann, *Electrochemistry of Silicon*, Wiley-VCH, 2002.